


Product Specifications

FlashCheck. Certified Waterproof Lollipop Min/Max Thermometer

Measurement Range	-58°F to 392°F (-50°C to 200°C)
Operating Range	32°F to 122°F (0°C to 50°C)
Accuracy	±1°F (-4°F to 302°F) ±0.5°C (-20°C to 150°C) or ±1%, whichever is greatest
Sensor	Thermistor
Display Resolution	0.1°F/ °C
Display Reading Update	1 second
Display Window Size	0.77 in W x 0.37 in H (19.5 mm W x 9.5 mm H)
Calibration	N.I.S.T. Traceable Calibration Certificate
Battery	Button Cell Alkaline
Body Casing	ABS plastic
Probe Dimensions	4.13 in. (L) x 0.14 in. (Dia.) 105 mm (L) x 3.5 mm (Dia.)
Weight	1.4 oz. (40 gm)
Waterproof Rating	IP67
Certification	CE Mark, RoHS
DeltaTrak manufactures products under an ISO 9001:2008 registered quality management system	

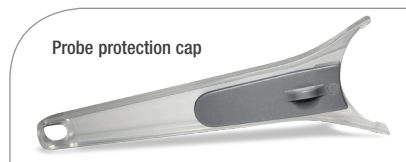

Model 11049

- °F /°C selectable
- Min/Max memory stores lowest/highest readings until reset
- NIST traceable Calibration Certificate included
- Probe cover with pocket clip
- Waterproof housing, IP67 rated

SS0188 15D1

