


# Product Specifications

## FlashCheck Jumbo Display Auto-Cal Needle Probe Thermometer



<b>Measurement Range</b>	-40°F to 311°F (-40°C to 155°C)
<b>Accuracy</b>	±1°F (14°F to 194°F), ±0.5°C (-10°C to 90°C) or ±1% whichever is greatest
<b>Response Time</b>	Less than 5 seconds (0°C to 25°C/32°F to 77°F)
<b>Resolution</b>	0.1° (F or C)
<b>Display Size/ Update</b>	1.5" x 0.5" (38mm x 12.7mm)/Every 2 Seconds
<b>Waterproof Rating</b>	IP56
<b>Probe Length and Tip Diameter</b>	Stainless steel probe, length 3.90 +/- 0.004 in. (99 +/- 0.1mm); 14 Gauge - Needle probe 0.067 in. (1.7mm) dia.
<b>Body</b>	ABS plastic
<b>Factory Calibration</b>	NIST traceable calibration certified
<b>Compliance Certificate</b>	Manufacturers certificate of compliance available from DeltaTrak, NIST Traceable, NSF, CE
<b>Battery</b>	1.5V

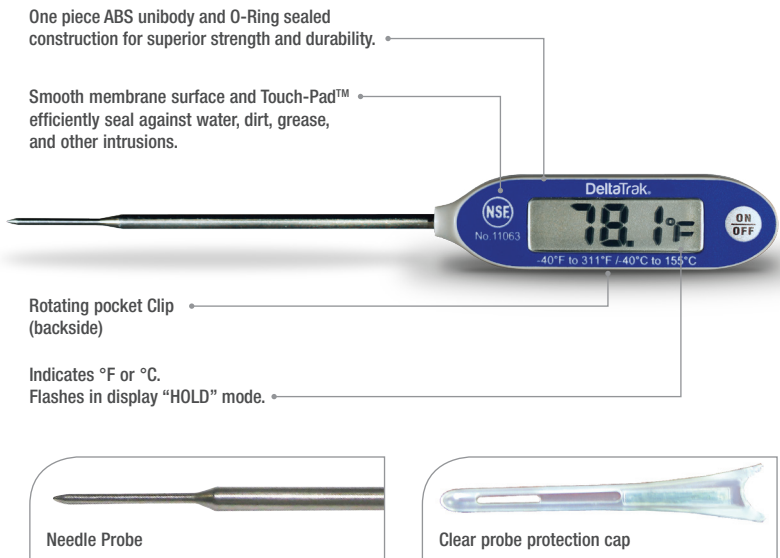

### Model 11063

This unique, next-generation, Needle Probe Thermometer is engineered to set the industry standard for accuracy, durability and readability. It is designed and constructed under exacting standards to meet and exceed specifications required for commercial and professional uses.

- New "Auto-Calibration" feature
- Needle probe thermometer provides fastest response time
- Small-diameter needle probe ideal for measuring temperature of "thin mass" food such as meat patties, chicken, and fish fillets per FDA Food Code 4-302.12(B)
- Sealed unibody construction and RoHS-compliant
- IP56 waterproof & grease resistant

DeltaTrak manufactures products under an ISO 9000 registered quality management system
Patent No. 5,709,476 5,801,968



SS0012 13K1

