


Product Specifications

measuring range	-40° C to 65° C
temperature resolution	0.1° C
precision	±.5° C (10° C to 25° C); ±1.0° C (>25° C), ±1.0° C (<-10° C)
data capacity	3823 data points
Data download time	General 2 seconds/3823 points
Programmable alarm levels	High, low, whole temperature range, LCD display
cell	3V lithium battery (CR2032) / 18 months
size	40mm x 81mm x 15mm
shell	PC/ABS plastic
weight	36g
impact resistance	Can withstand 1 meter drop to hard surfaces
authentication	CE Mark, NIST traceable, RoHS compliant
show	LCD display, red LED alarm
waterproofing grade	IP54
storage condition	-20° C to 50° C, 0% to 95% RH non-condensing
Minimum system requirements	PC XP/Windows 7/OS
download request	USB connects the recorder directly to the PC. Program and view data with FlashPDF Program Manager software. Model 20412

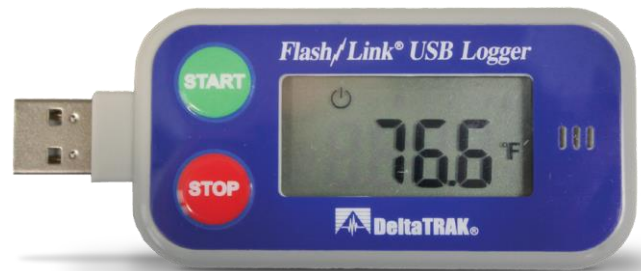

Model 20901

- Single channel, internal ambient temperature sensor
- User programmable: manual or automatic start, sampling interval, alarm limits, data labels
- Large, easy-to-read LCD display
- Historical statistics displayed on LCD
- traceable to NIST, CE mark
- USB connection



DeltaTRAK manufactures products under ISO9000 quality management system

SS0077 13J1C

Shenzhen DTI Investment Development Co., Ltd. Room 908, No. 6 Dongsha Road,
Shuitousha Village, Nan'ao Town, Longgang District, Shenzhen City, China Sales: 86(755)
8442-9007/8442-9388 Technical Support: 86 (755)8442-9800 Ext. 805 Fax: 86(755)8442 9388
www.deltatrakchina.com.cn, www.deltatrak.com