


# chart recorder

Temperature/humidity  
/dew point sensor

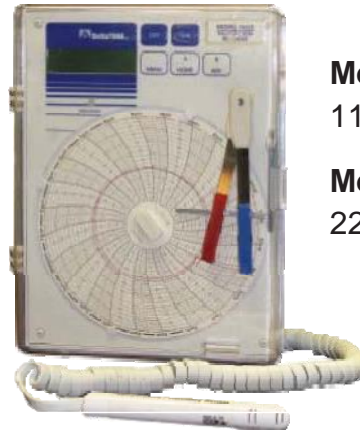

**Model 14013**  
115V Recorder

**Model 14014**  
220V Recorder

- Easy-to-read LCD display showing temperature and humidity
- Full function alarm
- 48 hours of power failure battery backup

operating ambient temperature range	0 to +50° C
storage temperature	-18° C to +50° C
main power supply	Model14013:115VAC, 50/60Hz. Plug-in adapter, model 14014:220 - 240VAC, 50Hz
Optional backup power supply	8AAalkaline batteries (approximately48hours)
temperature accuracy	+/- 1° C
relative humidity range	10-90%
the precision of relative humidity	+/- 3%, 20% to 80% @ 25° C
dew point margin	0° C to +50° C
sensor	Temperature/humidity with6-foot extension cable
picture	6-inch circular chart
Figure Rotation Speed	31days, 7days, 24hours, 12hours, 6hours, 3hours or 1.5hours
Figure Rotation pattern	User selection-single turn or continuous
Figure Speed Accuracy	+/- 1 %

show	alphanumeric backlit LCD display, 16characters, 2lines
Temperature alarm range	-30° C to +50° C
Alarm delay range	User selectable: no delay, 10 minutes, 30minutes, 1hour... 0rtwohours.
Remote alarm connection	Usually 48VAC/DC, 0.1amp., dry contact
install	Vertical or horizontal; free-standing or wall-mounted
size	9.25 inches x 7.25 inches x 2.75inches
weight	2.5pounds
power dissipation	3.5W

**Shenzhen EO Technology Co., Ltd. , Ltd.**

Address: Room 909, No. 13, Hehun Lane 1, Wuhe Avenue, Bantian, Longgang District, Shenzhen

Add: Rm 909, No. 13 1st Lane Hekan, Wuhe Avenue BanTian, LongGang Area, ShenZhen

Tel: (86 755) 8420 0058 Fax: (86 755) 2822 5583 E-mail: sales@szeo.cn Website: www.szeo.cn