



ITAG[®] 4 TH

Single Use Temperature Humidity USB PDF Recording Indicator



ITAG[®]4 series data loggers are developed to monitor and capture temperature or humidity excursions in pharmaceutical, biological and clinical trial supply chains. With TempSen's advanced measurement technology, user could easily have a reliable monitoring results accurately reflecting the supply chain environmental conditions.

Easy-to-read LCD indication presents key information for immediate decision making, the compact and lightweight design also enables it fits into any limited spaces. Furthermore, automatically generated PDF report allows quick access to shipment data anywhere anytime, and enables efficient supply chain handling, embedded raw could be extracted and studied through TempSen cloud based service.

As a complete software-free cold chain monitoring tool, ITAG4 requires no software for programming, online configuration portal realized the configuration of logger anytime anywhere, higher supply chain disposition efficiency but lower IT investment costs.

It's an ideal electronic recorder that you need to precisely track the environmental conditions that may compromise quality.

Auto PDF Report with Embedded Data

Automatically generated encrypted PDF format report, no software required to access data record, embedded raw data allows further analysis of data via TempCentre and Cold Chain Cloud[™].

Software-Free Online Configuration

Allows immediate online configuration, no need to download and install programming software before shipping.

Intuitive LCD Indication


LCD presents all key information regarding recording results, including alarm and running status, monitoring history, alarm violation indication and duration statistics.

FDA 21 CFR 11 Compliance

Designed for FDA 21 CFR part 11 compliance (with TempCentre).

Qualified for Air Transport Monitoring

Complies with DO-160G Environmental Conditions and Test Procedures for Airborne Equipment, qualified for air transport in active status.

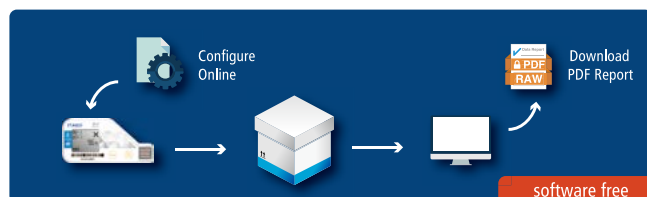

| | |
|---------------------|--|
| Type | Single Use |
| Sensor | Internal temperature and humidity sensor |
| Memory Capacity | 7200 readings |
| Measurement Range | -30°C...70°C, 0% RH...100% RH |
| Accuracy | ± 0.5°C (0°C...60°C), ± 1°C (rest range) ±4% RH (20% RH...80% RH), ±5% (rest range) |
| Resolution | 0.1°C / °F, 0.1% RH |
| Start Mode | Manual / Auto start |
| Logging Interval | 1 minute...2 hours |
| Alarm Range | High and low alarm |
| Battery | 3.0V CR2032 lithium battery |
| Run Time | 60 days |
| Shelf Life | 2 years (1 year if activated) |
| Display | LCD •OK(✓), Alarm(x), Running status •Limit violation event indicator •Duration time of each alarm zone •Temperature & humidity statistics (max, min, avg) |
| Connection | USB 2.0 Connector |
| Automatic Data File | Encrypted PDF report with embedded raw data |
| Software | TempCentre (21 CFR 11 compliant) |
| Calibration | Factory Sampling 6-point Calibration (AQL 0.25) |
| Certifications | CE, EN12830, DO160G, RoHS, Manufacturer's Validation Certificate |
| Dimensions | 93mm L x 45mm W x 7mm H |
| Weight | Approx. 25g |
| Packaging/Material | Case / Polycarbonate |
| Protection Class | IP54 |

APPLICATIONS

- Pharmaceuticals / biologicals distribution
- Fruits / vegetables distribution
- Global wide clinical trial supply chain
- Perishables delivery
- Blood products delivery



Please learn more about ITAG®4 TH data logger via www.eofirm.com