

# PR1000IS

## Intrinsically Safe Pressure and Temperature Data Logger



The PR1000IS is an intrinsically safe pressure and temperature data logger used to accurately monitor and record at user programmable reading intervals. It carries hazardous location, intrinsically safe certification in accordance with the latest issue of FM3600, FM3610. The rugged stainless steel design allows for the device to be placed in harsh environments, which makes it well suited for use with air conditioning systems, chilled water, hot water, air, gas, oil and steam pressure systems.

The PR1000IS can also monitor and record transient pressure through software configuration of user defined trigger thresholds and time periods. The logger can be configured to record measurements at rates as fast as 128Hz or as slow as once every 24 hours. The non-volatile memory has a capacity of over 2 million readings.

The PR1000IS uses a stainless steel pressure strain gauge to accurately measure the pressure. The 1/4 inch NPT pressure port featured on the device allows for compatibility with a variety of fittings and adapters. The internal temperature sensor provides ambient temperature measurements. The PR1000IS is also fully submersible. There are many different pressure ranges available to fit most any application.


### Features

- Rugged
- Reusable
- Submersible
- Programmable start time
- Real-time operation
- User-friendly
- Low cost
- CE compliant

### Certified Intrinsically Safe


- Class I, II, III, Division 1, Groups A-G,  $-40^{\circ}\text{C} < T_{\text{amb}} < +80^{\circ}\text{C}$ , T4A
- Class I, II, III, Division 2, Groups A-D, F, G,  $-40^{\circ}\text{C} < T_{\text{amb}} < +80^{\circ}\text{C}$ , T4A
- Temperature Class: T4A
- CAN/CSA-C22.2 No. 60079-0:15
- CAN/CSA-C22.2 No. 60079-11:14

### MadgeTech 4 Software Features

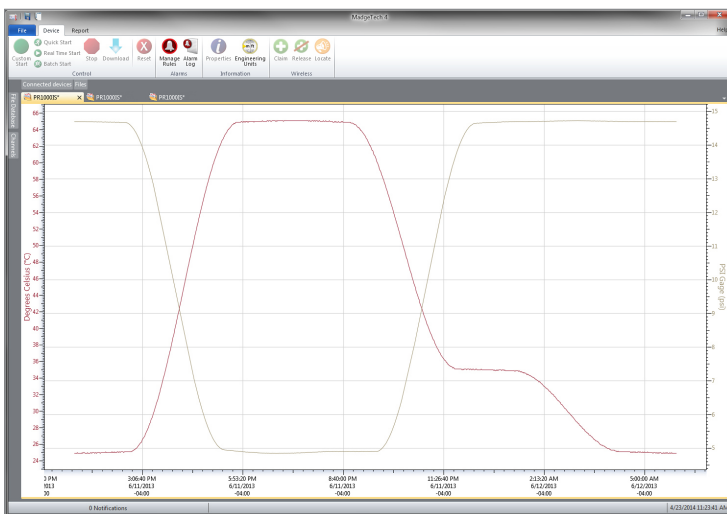


Graph View

- Multiple graph overlay
- Statistics
- Digital calibration
- Zoom in/ zoom out
- Lethality equations
- Mean Kinetic Temperature
- Full time zone support
- Data annotation
- Min./Max./Average lines
- Summary view




#### Statistics



#### Export to Excel

Time	Time Zone	Data
1:13:37 PM	-04:00	-05:00:00
1:14:37 PM	-04:00	-05:01:00
1:15:37 PM	-04:00	-05:02:00
1:16:37 PM	-04:00	-05:03:00
1:17:37 PM	-04:00	-05:04:00
1:18:37 PM	-04:00	-05:05:00
1:19:37 PM	-04:00	-05:06:00
1:20:37 PM	-04:00	-05:07:00
1:21:37 PM	-04:00	-05:08:00
1:22:37 PM	-04:00	-05:09:00
1:23:37 PM	-04:00	-05:10:00
1:24:37 PM	-04:00	-05:11:00
1:25:37 PM	-04:00	-05:12:00
1:26:37 PM	-04:00	-05:13:00
1:27:37 PM	-04:00	-05:14:00
1:28:37 PM	-04:00	-05:15:00

#### Tabular Data View



#### Automation

### Applications

- Pneumatics
- Process control systems
- Gas compressors
- Natural gas production
- Lubrication systems
- Chemical processing
- Pulp and paper processing
- Medical instrumentation
- Environmental studies
- Waste water treatment
- HVAC
- Oil & gas industries

## SPECIFICATIONS

Specifications are subject to change without notice. Specific warranty remedy limitations apply. Call (603) 456-2011 or go to [madgetech.com](http://madgetech.com) for details.

TEMPERATURE	
Temperature Sensor	Semiconductor
Temperature Range	-40 °C to +80 °C (-40 °F to +176 °F)
Temperature Resolution	1.0 °C (1.8 °F)
Calibrated Accuracy	±2.0 °C (3.6 °F) at 0 °C to +50 °C (+32 °F to +122 °F) ±4.0 °C (7.2 °F) at -40 °C to -1 °C (-40 °F to +30 °F) ±4.0 °C (7.2 °F) at +51 °C to +80 °C (+124 °F to +176 °F)

PRESSURE	
Pressure Sensor	Semiconductor strain gauge
Pressure Range	*See table below
Pressure Resolution	
Calibrated Accuracy	
Pressure Response Time	0.1 ms (10 to 90 %FSR)
Repeatability	±0.5 %FSR; ±0.2 % typical

GENERAL	
Start Modes	Software programmable immediate start or delay start up to six months in advance
Real Time Recording	May be used with PC to monitor and record data in real time
Memory	2,795,437 readings
Wrap Around	Yes
Trigger Mode Readings	762,228

**BATTERY WARNING:** FIRE, EXPLOSION, AND SEVERE BURN HAZARD. DO NOT SHORT CIRCUIT, CHARGE, FORCE OVER DISCHARGE, DISASSEMBLE, CRUSH, PENETRATE OR INCINERATE. BATTERY MAY LEAK OR EXPLODE IF HEATED ABOVE 80 °C (176 °F).

Reading Rate	1 reading every second up to 1 reading every 24 hours Up to 128 Hz in transient mode
Calibration	Digital calibration through software
Calibration Date	Automatically recorded within device
Battery Type	3.6 V lithium battery included, user replaceable
Battery Life	1 year typical (1 minute reading rate at 25 °C) 10 days at 128 Hz in transient mode
Data Format	Date and time stamped °C, °F, K, °R; atm, bar, hPa, inHg, inH <sub>2</sub> O, kg/cm <sup>2</sup> , kPa, MPa, mH <sub>2</sub> O, mbar, mmHg, Pa, psi, Alt in ft, Alt in meters
Time Accuracy	±1 minute/month at 25 °C
Computer Interface	IFC400 or IFC406 USB docking station required
Operating System Compatibility	Windows 7 or later
Software Compatibility	Software version 4.2.21.1 or later
Operating Environment	-40 °C to +80 °C (-40 °F to +176 °F) 0 %RH to 100 %RH
Dimensions	3.6 in x 0.97 in dia. (91.3 mm x 24.6 mm dia.)
Weight	5.5 oz (156 g)
IP Rating	Not Rated <b>Caution:</b> Do not submerge this product to retain IS rating
Material	316 Stainless Steel/Radel
Approvals	CE FM Class 3600, latest revision FM Class 3610, latest revision CAN/CSA-C22.2 No. 60079-0:15 CAN/CSA-C22.2 No. 60079-11:14

*Range (PSI)	0-30 PSIA/PSIG	0-100 PSIA/PSIG	0-300 PSIA/PSIG	0-500 PSIA/PSIG	0-1000 PSIA	0-5000 PSIA
Accuracy	2 %FSR, 0.25 % @ 25 °C typical					
Resolution (PSI)	0.0005 PSIA/PSIG	0.002 PSIA/PSIG	0.005 PSIA/PSIG	0.01 PSIA/PSIG	0.02 PSIA	0.1 PSIA

## Ordering Information

PR1000IS-1000A	PN 902254-00	0-1000 PSIA Intrinsically Safe Pressure and Temperature Data Logger
PR1000IS-100A	PN 902251-00	0-100 PSIA Intrinsically Safe Pressure and Temperature Data Logger
PR1000IS-100G	PN 902257-00	0-100 PSIG Intrinsically Safe Pressure and Temperature Data Logger
PR1000IS-300A	PN 902252-00	0-300 PSIA Intrinsically Safe Pressure and Temperature Data Logger
PR1000IS-300G	PN 902258-00	0-300 PSIG Intrinsically Safe Pressure and Temperature Data Logger
PR1000IS-30A	PN 902250-00	0-30 PSIA Intrinsically Safe Pressure and Temperature Data Logger
PR1000IS-30G	PN 902256-00	0-30 PSIG Intrinsically Safe Pressure and Temperature Data Logger
PR1000IS-5000A	PN 902255-00	0-5000 PSIA Intrinsically Safe Pressure and Temperature Data Logger
PR1000IS-500A	PN 902253-00	0-500 PSIA Intrinsically Safe Pressure and Temperature Data Logger
PR1000IS-500G	PN 902259-00	0-500 PSIG Intrinsically Safe Pressure and Temperature Data Logger
PR1000IS-1000A-KR	PN 902284-00	0-1000 PSIA Intrinsically Safe Pressure and Temperature Data Logger with key ring end cap
PR1000IS-100A-KR	PN 902281-00	0-100 PSIA Intrinsically Safe Pressure and Temperature Data Logger with key ring end cap
PR1000IS-100G-KR	PN 902287-00	0-100 PSIG Intrinsically Safe Pressure and Temperature Data Logger with key ring end cap
PR1000IS-300A-KR	PN 902282-00	0-300 PSIA Intrinsically Safe Pressure and Temperature Data Logger with key ring end cap
PR1000IS-300G-KR	PN 902288-00	0-300 PSIG Intrinsically Safe Pressure and Temperature Data Logger with key ring end cap
PR1000IS-30A-KR	PN 902280-00	0-30 PSIA Intrinsically Safe Pressure and Temperature Data Logger with key ring end cap
PR1000IS-30G-KR	PN 902286-00	0-30 PSIG Intrinsically Safe Pressure and Temperature Data Logger with key ring end cap
PR1000IS-5000A-KR	PN 902285-00	0-5000 PSIA Intrinsically Safe Pressure and Temperature Data Logger with key ring end cap
PR1000IS-500A-KR	PN 902283-00	0-500 PSIA Intrinsically Safe Pressure and Temperature Data Logger with key ring end cap
PR1000IS-500G-KR	PN 902289-00	0-500 PSIG Intrinsically Safe Pressure and Temperature Data Logger with key ring end cap
IFC400	PN 900319-00	Docking station with USB cable
IFC406	PN 900325-00	6-Port multiplexer docking station with USB cable
TL2150/S	PN 901745-00	Replacement battery for the PR1000IS