


# Product Specifications

## FlashLink<sup>®</sup> Vaccine Electronic Shipping Indicator

<b>Monitoring Period</b>	85 Days
<b>Measurement Range</b>	-40°F to 122°F (-40°C to 50°C)
<b>Temperature Accuracy</b>	±1.0°F/0.5°C
<b>Alarm Settings</b>	Factory pre-configured per model
<b>LED Indicators</b>	Flashing Green: Active, no alarm Flashing Red: Alarm triggered
<b>Battery</b>	Coin Cell Lithium Battery
<b>Dimensions</b>	2.68in L x 1.27in W x 0.45in H (68.07mm L x 32.25mm W x 11.43mm H)
<b>Casing</b>	ABS plastic
<b>Weight</b>	0.64 oz. (18.14g)
<b>Shock Resistance</b>	Withstands 3-foot (1 meter) drop to hard surface
<b>Certification</b>	CE Mark, Calibration Traceable to N.I.S.T., RoHS Compliant
<b>IP Rating</b>	IP56
<b>Storage Conditions</b>	-4°F to 122°F (-20°C to 50°C) 0% to 95% RH w/o condensation

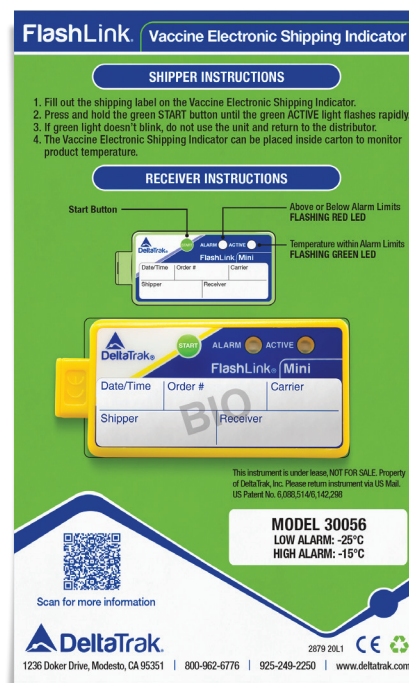

Models	30055	30056
<b>Low / High Alarm</b>	2°C / 8°C	-25°C / -15°C

- Compact single-use electronic indicator
- Monitor vaccines during storage and transport
- Refrigerated vaccine alarms: low 2°C / high 8°C
- Frozen vaccine alarms: low -25°C / high -15°C
- Immediate visual pass/fail indicator
- Mounted on high-visibility locator card
- Post-trip evaluation service available

DeltaTrak manufactures products under an ISO 9001:2015 registered quality management system

SS\_30055-X\_20L6

